PRE SUBMISSION CHECK LIST



LATHAM Avoid additional trips to your job site. Check the dimensions and information below. Incorrect, missing or illegible dimensions may delay production and delivery.

LINERS

Vinyl Over Steps

- Fastener Type: Bead, Velcro, Rod Pockets, None.
- Coping: Front or Top Mount.
- · Corners: Square, Diagonal or Radius.
- Location: Indicate step's location.

A/B Points & Distances

- A/B Points Indicate distance between A/B Points.
- Sketch Pool Shape, A/B line, hopper & pool direction.

Overall Dimensions

New Pools – Provide manufacturer's panel layout, or see existing pools below.

Existing Pools – Please complete the Latham Order Form. Individual pool bottom measurements MUST = overall length and width (A&B) measurements.

Grecian Pools

Provide dimensions for all sides of the pool & hopper pad shape. Measure to the point of the pool corner, not a radius coping.

Pool Corners

Indicate Square, Diagonal or Radius. Indicate dimensions in inches. Guides are available to help determine sizes.

Color / Pattern / Thickness

Clearly indicate these three choices.

ABG Liners

Indicate: A) Wall height, B) Bead or Overlap, C) Make if non-standard.

Preformed Steps

Indicate step location within pool perimeter for liner wall seam location.

SAFETY COVERS

Step Dimensions

Double check Depth, Width, & Shape.

A/B Points & Distances

Free Form Covers - include:

- Distance between A/B points.
- Pool sketch showing A/B line, pool direction, and all obstructions.
- Replacement covers measure to anchors and pool from the same A/B line.

Corners

Indicate pool corners as Square, Diagonal or Radius. Include dimensions in inches. Guides are available to help determine sizes.

Grid Spacing

Geometric shapes must indicate 3x3 or 5x5.

Grecian Covers

Provide dimensions for all sides of the pool. Measure to the point of the pool corner, not a radius coping.

Color / Material

Clearly indicate these choices.

Pump / Drain / Waiver

One must be selected.

Deck Type & Size

- Confirm at least 3' of deck; decks less than 3' can use the reduced deck mount system.
- Indicate Deck type, Anchor, and if padding is required.

Obstructions

- Indicate all non-removable obstructions within 3' of the pool.
- Provide photos of all obstructions.



MEASURING INSTRUCTIONS

ONLY COMPLETE LEGIBLE ORDERS CAN BE PROCESSED

Equipment needed: 100 ft. Tape Measure, Pen, Note Paper / Measure Forms, Chalk ,(2)-2' stakes (Re-bar), Large Hammer, Duct or Masking tape, Combination Square, Digital or Film Camera.


- 1. When preparing to measure for a liner using the point to point triangulation method, you should first determine the best placement of the "A-B" line. It is recommended that it be on either side of the pool length and roughly parallel with the centerline of the pool.
- 2. Establish two points, "A-B" with "A" on the left as shown. The "A-B" line must be 3' away from the pool and 2/3 the length of the pool; 20'-25' is typical (show this on the sketch). To mark "A-B" points on deck use chalk, on dirt or grass use stakes. Do not remove the "A-B" stakes or marks until the measurements have been confirmed and approved. Be sure to record the distance between A and B.

NOTE: The "A-B" line must never cross the pool line and should be approximately 3' away from the pool at the closest point (4' to 5' away from pools over 44' long).

3. Using chalk or tape, mark and number points for the deep / shallow breaks (P,Q,R,RC) and steps. Mark the ends of straight walls, reverse radius, and corners. For the remaining pool perimeter mark at approximately 2' intervals.

Intervals of 1' or less should be used on small or tight radius areas. Use a minimum of three points on radius corners. If the deck cantilevers the pool wall, mark the deck appropriately to represent the pool wall. A combination square can aid in transferring marks to the coping.

4. Measurements are now taken from point "A" to #1, then point #2, and all the way around the pool. Then measure from point "B" to same point #1 and then #2, as you did for point "A". Two tape measures can help expedite the process. Measurements are listed in column format as shown. Measurements should be accurate to a quarter inch.

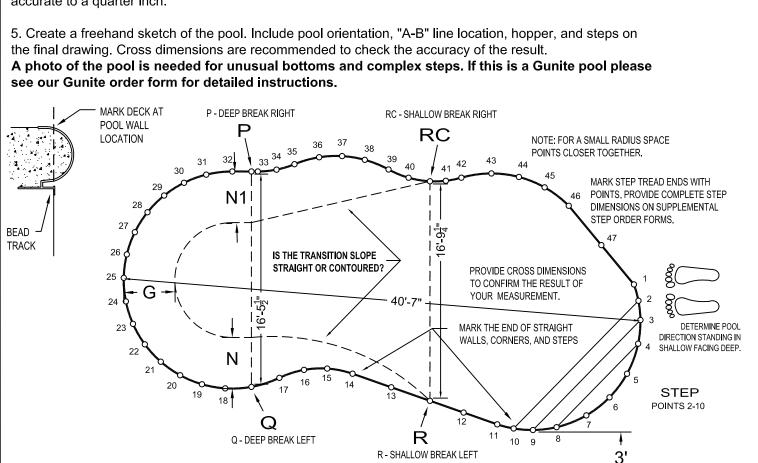

NOTE: MAKE SURE THE A-B LINE IF EXTENDED IS NOT CROSSING THE PERIMETER OF THE POOL.

PROVIDE BACK AND SIDE SLOPE

NO.

1

2

3

4

5

6

7

8

9

10

11 12

13

14

15

16

17 18

19

20

Α

25'-2'

26'-10'

28'-5'

30'-4"

В

20'-8"

19'-3"

18'-6"

17'-11

	-B / Point to Point	ORDER F	ORM ORDER QUOTE				
	NEW INSTALLATION REI	PLACEMENT .	JOB NAME:				
SHIPPING INSTRUCTIONS	BRANCH		DATEDEALER P.O.#				
BRANCH ☐ DEALER ☐ ☐ COMMON CARRIER	P.O.#		DEALER NAME				
VIA	_ <u>SHIPPING ADDRESS</u> BRANCH	☐ DEALER ☐	STREET				
☐ AIR FREIGHT DAY	NAME		CITY/STATE				
OTHER	- STREET		PHONE # ZIP				
ADDITIONAL WATER AND LABOR INSURANCE	CITY/STATE		DEALER FAX #				
SHOWCASE OR	PHONE #	ZIP	MARK BOX HOMEOWNER				
STRONG SUPPORT DEALER	BRANCH E-MAIL		DEALER E-MAIL				
WALL: 20 MIL		BEAD TYPE: Ing	ground BEADED │ / OVERLAP │ ,,				
27 MIL VINYL TILE/ W/	NII DATTEDNI		JND - UNIVERSAL (INCHES)				
BOTTOM: 20 MIL VINYL TILE/ W/		PERFORMANC	CE LIAMS SMALL J-HOOK (WILKES) SEE BEAD				
27 MIL FLOOR PATTER			QUIRES SURE-FIT COPING) CHART				
STEP DIMENSIONS:		,	L. UNLESS SPECIFIED-				
CORNER 1 CORNER	R 2	ECTANGLE STE	p TOP VIEW				
☐ SQUARE ,, ☐ SQUARE	,,	LOTANOLL STE	CORNER 1 CORNER 2 CORNER 2				
□ DIAG. □ DIAG.			T1 WIDTH #2 [W2]				
,,,	"						
☐ RADIUS ☐ RADIUS			TO				
CORNER 4 CORNER			90°				
□ SQUARE ,, □ SQUARE	77 R1 T1 R2 T2		CORNER 4				
☐ DIAG	l l	Т3	CORNER 3				
		R4 _{FLOOR}	SETBACK DISTANCE"				
RADIUS RADIUS		— — — -					
RISERS - INCHES ROMAN S	TEP TOP VIEW	, L	CORNER STEP TOP VIEW				
R1	T1	_	CORNER 1				
R2	WIDTH #1 [W1]						
R3	T2 WIDTH #2 [W2]	\ \ \ \	T1				
R4	T3 WIDTH #3/4 [W3/W4]	\	T2 WIDTH #1 [W1]				
R5 CORNER 4							
COMMENT		CORNER 3	13 / WIDTH #3 & #4 [W3/W4]				
TREADS - INCHES	SETBACK DISTANCE	- -	MEASURE T1 TO CENTER OF CORNER				
T1 FOR VINYL OVE	R STEP	I					
			DESCRIPTION				
	P: PART NUMBER						
T <u>4</u>			EXTURED WHITE TEXTURED BLUE				
WIDTHS - INCHES			ANITE TEXTURED BL. MOSAIC				
W1			ISION TEXTURED CREEKSTONE				
\M2			HOOK & LOOP(VELCRO) NONE NONE				
W3 FASTENER ON	SIDES OF TREAD 1 ONLY (T1)	YES LI NO L	OTHER:				
STEP LOCATION	N: CENTER SHALLOW END	FOR OTHER	R LOCATIONS PLEASE USE C-POINTS PAGE				
W4							
W5 STEP LOCATED:	(Inches) from POI	NT # &	(Inches) from POINT #				
FOR ADDITIONAL ORDER FO	RMS PLEASE VISIT: HTTP://	WWW ORDERFO	DRMS.IPOOLPRO.COM 11-20-2014				

	-ATH	AM	JOB NA	ME:				P.O.#			
	behind ev	ery pool		Α	В		Α	В		Α	В
_	Α	В	18			36			54		
			19			37			55		
			20			38			56		
			21			39			57		
						40			58		
			23			41			59		
			24			42			60		
			25			43				REAK L	INES
			26			44			P DEEP RT.		
			27			45			Q DEEP LT.		
)			28			46			RC SHAL RT		
			29			47			R SHAL.LT.		
			30			48			P to	Q	1
;			31			49			RC 1	o R	
			32			50			BAC	K & SIDE	SLOPE
			33			51			G BACK WALL		
			34			52			N LT. WALL		
Ì			35			53			N1 RT. WALL		
N٦	ANCE FR OF STEP: ST TCH:			/ VINYL CO	VER STEP: YES			ICLUDING THE A		, IF YES	" IGHT
										DEPTH_	
										PERIME	,
											DIMENSI
										#	_to #
										DISTAN	CE
										#	_to #
										DISTAN	CE
										#	_to #
										DISTAN	CE
										#	_to #
NOTE: MAKE SURE THE A-B LINE IF EXTENDED IS NOT CROSSING THE PERIMETER OF THE POOL.									DISTAN	CE	

FOR ADDITIONAL ORDER FORMS PLEASE VISIT: HTTP://WWW.ORDERFORMS.IPOOLPRO.COM

3-1-2013



JOB NAME:	P.O.#	

ADDITIONAL POINTS

Α	В	Α	В	1 1	Α	В	ı	Α	В